



## RAIL MOUNTING TRANSMITTER

## Mp88700

### 2-wire rail mounting transmitter

### Mp88700

- Microprocessor based
- RTD, T/C, mV and Ohm input
- Fully linearized
- Fully isolated
- RFI / EMI protected
- High accuracy (Typical 0.1%)
- ATEX and FM approval available
- 5 Year warranty



## Specifications

Input RTD	Pt100, Pt250, Pt500, Pt1000, Ni100, Ni500, Ni1000, Cu10, Cu100
Input T/C	K,J,L,T,U,E,R,S,B,C,D,N
Other inputs	Ohm, mV
Minimum Span	<b>See table below</b>
Output	4...20 mA or 20...4 mA
Linearization	On / Off
Supply	10...40 VDC, Polarity Protected (ATEX certified units 10 – 30 VDC)
Supply Effect	0.001%/V
Max. Ripple	10 V PP. Min Vbat=10 VDC
Zero Drift	± 0.01%/°C or ±0.02°C/°C
Span Drift	± 0.005%/°C or ±0.01°C/°C
Long Term Drift	± 0.05%/Year
Cold Junction Drift	± 0.01°C/°C
Excitation Current, RTD	0.1 mA
Sensor Lead Resistance, RTD	500 Ohm max.
Sensor Lead Resistance Effect	0.001°C/Ohm
Sensor Lead Resistance, T/C	10,000 Ohm max.
Open Circuit Detection	Upscale / Downscale
Load Capability	Vbat-10V / 20 mA
Startup Time	20 sec.
Warmup Time	5 Min.
Ambient Operating Temp.	-40...+ 85°C
Isolation	500 VDC / 1500 VAC
Ingress Protection	IP30
Storage Temperature	-40...+100°C
Housing Material	Makrolon
Housing Dimension W x H x D	22.5 x 75 x 99 mm (0.89" x 2.92" x 3.9")

## Order information and options


### Example:

Model Mp88700 -EX-FM-IF

Options:

- EX = Intrinsically safe version (ATEX Ex II 1 G EEx ia IIC T4...T6)
- FM = Intrinsically safe version (IS/I/1/ABCD/T6)
- IF = Interface and software

## Dimensions

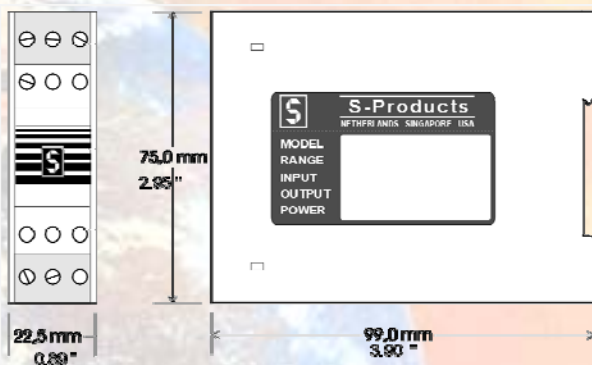

## Sensor ranges

Sensor type	Temp. Min. °C	Temp. Max. °C	Span Min. °C
K (NiCr-Ni)	-270	1370	50
J (Fe-CuNi)	-200	1200	50
L (DIN Fe-CuNi)	-200	900	50
T (Cu-CuNi)	-270	400	50
U (DIN Cu-CuNi)	-200	600	50
E (NiCr-CuNi)	-270	1000	50
S (Pt10%Rh-Pt)	-60	1760	250
R (Pt13%Rh-Pt)	-60	1760	250
B (Pt30%Rh-Pt6%Rh)	0	1820	600
Pt100 IEC751	-200	850	25
Pt250 IEC751	-200	850	25
Pt500 IEC751	-200	850	25
Pt1000 IEC751	-200	850	25
Ni100 IEC751	-60	250	25
Ni500 IEC751	-60	250	25
Ni1000 IEC751	-60	250	25
Cu10	-200	250	25
Cu100	-200	250	25
C (W5%Re-W26%Re)	0	2300	150
D (W3%Re-W25%Re)	0	2300	150
N (NiCrSi-NiSiMg)	-270	1300	50
mV	0	1000	10
Ohm	0	9999	100



# S-Products

[www.s-products.com](http://www.s-products.com)