



PROCESS INDICATOR

PM5625 (-Ex)

Loop powered process indicator

PM5625 (Ex)


- Weather proof housing (IP65)
- Easy to scale
- 3½ Digit LCD display
- No external power required (loop-powered)
- High accuracy
- EEx ia IIC T4, intrinsically safe optional
- 5 Year warranty



Specifications

Display	LCD 3½ digit, 12.5 mm (0.5") height
Read Rate	2.5 / second
Accuracy	0.1% of selected span
Zero adjustment	-1999 to +1999 selectable by DIP switch, fine adjustment by potentiometer
Span adjustment	0 to +1999 se
Zero drift	0.01%/°C
Span drift	0.01%/°C
Decimal point	Selectable by DIP switch
Voltage drop	4.5 V max.
Connection	Screw terminals
Dimensions H x W x D	75 x 125 x 75 mm (3" x 5" x 3")
Weight	250 g (9 oz.)
Operating temperature	-4...60°C
Storage temperature	-40...85°C
Relative humidity	95% RH @ 40°C; non-condensing

Dimensions

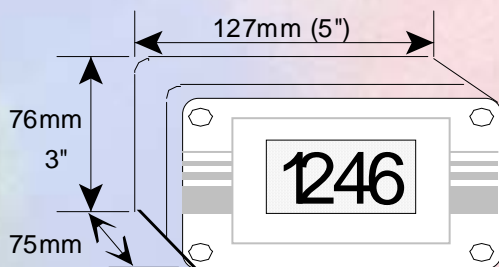

Order information and options

Specify model:

PM5625

Example:

Model PM5625-Ex

Options:

-Ex = Intrinsically safe version (EEx ia IIC T4)

