


# FS-380P: Industrial strength low-flow switch stands up to clogging & harsh environments.

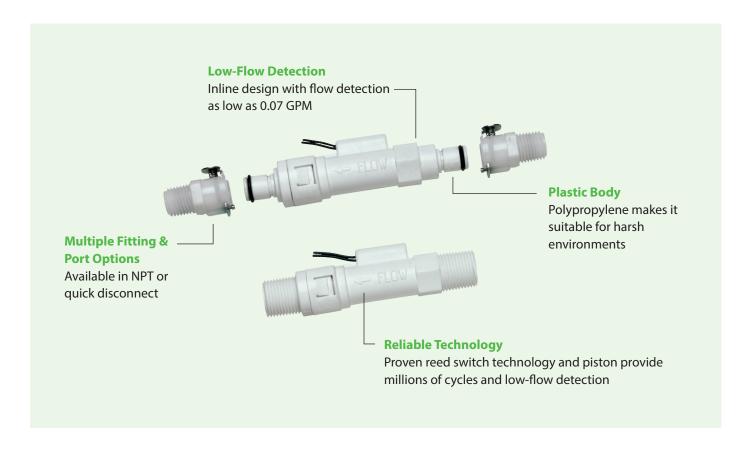

### Durable and economical polypropylene

The FS-380P's primary construction material is polypropylene making it lightweight and low cost. It is tolerant of harsh environments and can also withstand wash-downs, flushing and harsh chemicals.

#### Low-flow detection

The FS-380P is a low-flow indicator. Multiple set points are available with the lowest being 0.07 GPM.

#### Flexible mounting

The FS-380P utilizes a small, strong spring that is not affected by the mounting position of the flow switch and will perform at any orientation.

#### Proven reed switch technology

For over 60 years, Gems has utilized reed switch technology extensively in our product line, resulting in millions of successful cycles.

# Ready to Serve Your Most Critical Applications



HVAC
Fluid detection to protect against critical failures.





Semiconductor
Reliable coolant monitoring to minimize system down time.



Surgical & Cosmetic Lasers
Monitors coolant to ensure
patient safety.



Sterilization

Can withstand harsh environments, wash-downs and flushing.

# **FS-380P Competitive Advantages**

- **Multiple Mounting Options** The FS-380P will perform at any orientation and has multiple available mounting types
- Clog Resistant The FS-380P's lower pressure drop reduces risk of clogging
- **Compact, Inline Design** FS-380P inline design is more tolerant of particulate and less susceptible to sticking than alternate designs
- NSF Approved Materials Constructed with NSF approved materials
- Certifications RoHS, UL and CE certified

## **FS-380P Options**

- **Actuation Condition:** 
  - Fixed
- Flow Rate Settings:
  - 0.07 GPM to 2.00 GPM
- Mounting Types:
  - NPT
  - Push to connect options include European, O.D., Barb and multiple ports

Visit GemsSensors.com to view our full range of flow switching products.



FS-380 Metal Flow Switch



RFS Continuous Flow



FS-4 Plastic Flow Switch



FS-200 High Flow Rate Switch



**Global Corporate Headquarters** 

Toll-Free: +1-855-877-9666 Outside the US: +1-860-747-3000

www.gemssensors.com