

# Partlow 3200 1/32 DIN Indicator & Controller



- Red or Green Display
- Two process alarms
- Manual or Easy Tune
- Setpoint Lock
- On Control Indicator
- RS485 comms
- 0.1% Accuracy



 $\epsilon$ 

The Partlow 3200 is available as an indicator or controller. Small size does not come at the expense of features, they have large 10mm high displays, 2 amp relays and full 3-wire PT100 inputs. The controller features our hands-free Easy Tune PID algorithm

# **Specification**

#### **Features**

Functions
Control Types
Setpoint Lock
Output Configuration
Alarm 1 & 2 Types
Human Interface

Three term PID controller, indicator with alarms or indicator only versions available Controller versions have PID with Easy-tune, manual tuning plus pre-tune or On-Off control

Limits operator access to the controller setpoint value

Up to 3 Total. Max 1 for control, max 2 for Alarms

Process high, process low, setpoint deviation and band 3 button operation, 4 digit 10mm high LED display (available in either red or green), plus on-control, set-up, alarm and setpoint indicators

#### Input

Thermocouple RTD DC Linear Impedance

Accuracy

Sampling

J, K, R, S, T, B, & N 3 Wire PT100, 50Ω per lead maximum (balanced)

 $\hbox{0-20mA, 4-20mA, 0-50mV, 10-50mV. Scaleable -1999 to 9999, decimal point as required} \\$ 

>10M $\!\Omega$  for Thermocouple and mV ranges, 4.7  $\!\Omega$  for mA ranges

+/- 0.1% of input span (0.25% for J & T T/C) +/- 1 LSD (T/C CJC better than 0.7°C)

4 per second, 14 bit resolution approximately

<2 seconds (except on 0-20mA range), control O/P's turn off, high alarms activate for T/C and mV ranges, low alarms activate for RTD, mA ranges

# Sensor Break Detection Outputs & Options

Control & Alarm Relays

Contacts SPDT 2Amp resistive at 240V AC, >500,000 operations (if comms or 2<sup>nd</sup> relay is fitted, all relay contacts become SPST)

Control SSR Outputs Drive capability >10V DC into  $500\Omega$  minimum Communications 2 Wire RS485, 1200 to 9600 Baud, Modbus

### **Operating & Environmental**

Temperature & RH Power Supply Front Panel Protection Approvals and Certification 0 to 55°C (-20 to 80°C storage), 20% to 95%RH non-condensing

100 to 240V 50/60Hz 7.5VA (optional 12 to 24V AC 7.5VA /12 to 30V DC 4W)

IEC IP66 (Behind panel protection is IP20)


CE, UL & ULc









# **Dimensions**

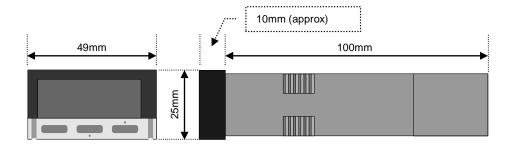



## **Connection Details**

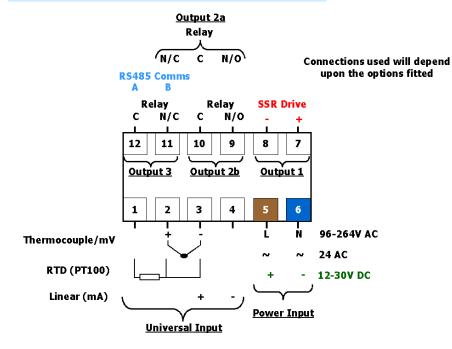

#### **Field Reconfiguration**

Hardware options cannot be retrofitted to this model. Some reconfiguration of existing features is possible

#### Input

Configurable to any available type.

#### No extra parts require **Control/Alarm 1 Output**

Re-configurable on controller version only, as relay control with SSR alarm 1, or SSR control with relay alarm 1. No extra parts required

# **Other Options**

RS485 comms or alarm 2 relay is only available at time of order.

No field re-configuration is possible










# **Order Code**

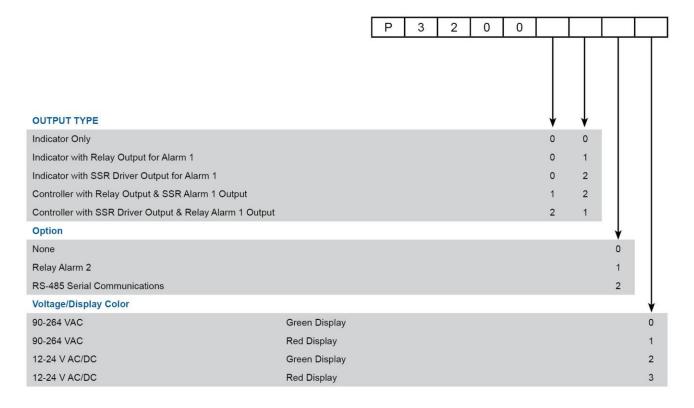

Austria	T: +43 (0)2236 691 121	AT@West-CS.com
China	T: +86 22 8398 8098	CN@West-CS.com
France	T: +33 (1) 77 80 90 42	FR@West-CS.com
Germany	T: +49 (0)561 505 1307	DE@West-CS.com
United Kingdom	T: +44 (0)1273 606271	UK@West-CS.com
USA	T: + 1 800 866 6659	NA@West-CS.com
Email	inquiries@West-CS.com	

www.West-CS.com

Website

For more details on the complete product range from West Control Solutions please contact your local distributor or visit www.West-CS.com.

L