# SERIES RIM Tach 1250 NorthStar™ brand

# **Bearingless Encoder**

### **Key Features**

- Bearingless Design Mounts to 250-C Face Motors (12.5" Diameter Mounting Flange)
- Sensor Modules are Removable On-The-Fly and Require No Gapping
- Stainless Steel and Ductile Cast Iron Construction for Harsh Mill Environments
- Magneto-Resistive Technology Resists
   Dust, Dirt, Oil, Water and Other Common
   Contaminants
- New Model Available with Larger Air Gap and Diagnostic LED. See NexGen RT1







## **SPECIFICATIONS**

#### STANDARD OPERATING CHARACTERISTICS

Code: Incremental, Magnetic
Pulses per Revolution: 60-1200 PPR

Phasing Sense: A leads B for Counter-Clockwise rotation (CCW) viewing encoder-mounted end

Quadrature Phasing: 90° ± 22° Symmetry: 180° ± 54°

Index: 270°, ungated (optional gated to

falling B edge)

Number of Output Modules: Single or Dual

#### **ELECTRICAL**

Input Power Requirements: 5-15 VDC, 15-26 VDC, 45 mA typical per sensor module plus line driver

**Output Signals:** 4428 Differential Line Driver: 150mA, sink or source

Frequency Response: 0 - 120kHz Data & Index Noise Immunity: Tested to EN61326-1

Electrical Immunity: Reverse polarity and short

circuit protected

**Connector:** 10 pin industrial duty latching, sealed NEMA 4 &12, IP65

#### MECHANICAL

Bore Sizes: 5/8" to 8" Available

Mounting Configuration: 12.5" C-Face Mount for

NEMA MG1 Standards

Shaft Speed: 7,000 RPM (J or K wheels); 3600

RPM (TL wheels)

Shaft Length Required: 3.0" min
Allowable Shaft End-Play: ± 0.050"
Allowable Shaft Runout: 0.003" TIR
Acceleration Rate: 3600 rpm/sec max
Housing Material: Cast Iron/Stainless Steel

Weight: 38.5 lbs

#### **ENVIRONMENTAL**

Operating Temperature Range: -40°C to +80°C Storage Temperature Range: -40°C to +120°C Shock (Sensor Module): 30 G's Min

Vibration: 18 G's @ 5-2000 Hz spectrum Humidity: Up to 98% (non-condensing)

#### **ELECTRICAL CONNECTIONS**

Connector Pin	Pigtail Cable	MS 3102E18-IT#	
1	Black	Α	
2	Green	E	
3	Blue	D	
4	Violet	С	
5	_	_	
6	Red	В	
7	Yellow	H	
8	Gray	G	
9	Orange		
10	Braid	J	
	1 2 3 4 5 6 7	1 Black 2 Green 3 Blue 4 Violet 5 — 6 Red 7 Yellow 8 Gray 9 Orange	

<sup>\*</sup> Index (Z) optional. See Ordering Information

# NorthStar™ brand SERIES RIM Tach 1250


### **Ordering Information**

To order, complete the model number with code numbers from the table below:

Со	de 1: Model	Code 2:	PPR	Code 3: Index	Code 4: Wheel Bore	Code 5: Output	Code 6: Electrical	Code 7: Termination		
	R1									
	Ordering Information									
R1	Motor Mount Ring, for 12-1/2" C-Face Motors	0064 ( 0075 ( 0120 ( 0128 ( 0150 1	0300 0480 0512 0600 0960 11024 11200	L No Index  Available when Code 2 is 0480, 0512, 0600, 1024, 1200 or 2048  G Gated Index (Z, Z̄)  Z Differential Index (Z, Z̄)	J04 5/8" J05 7/8" J06 1.00" J07 1-1/8" K09 1-3/8" K10 1-1/2" K11 1-5/8" K12 1-3/4" K13 1-7/8" K14 2" K15 2-1/8" K16 2-1/4" K17 2-3/8" K18 2-1/2" K19 2-7/8" For additional bore sizes up to 8.0" maximum, please consult factory.	1 Single 2 Dual (Isolated) Differential, bidirectional signals (A, Ā, B, B)	L 5-15V in, 5-15V Line Driver (4428) out R 15-26V in, 15V Line Driver (4428) out 5 5-15V in, 5V Line Driver (4428) out	C Latching Industrial Connector with 1/2" NPT F Latching Industrial Connector without Mating Connector M 10 pin MS Connector P 18" Pigtail		

Note: See ACCESSORIES Section For Connectors, Grounding Brushes, Spare Parts and Pulse Wheels

# **DIMENSIONS**

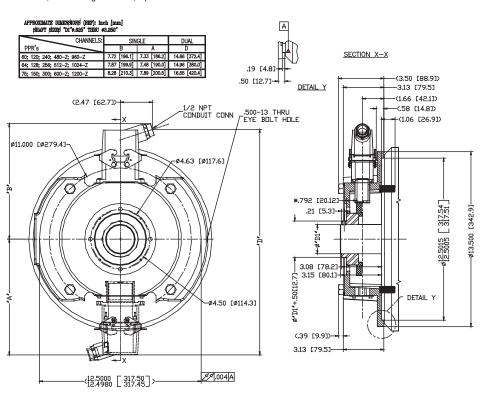



Headquarters: 1675 Delany Road • Gurnee, IL 60031-1282 • USA

**Customer Service:** 

Tel.: +1.800.873.8731 Fax: +1.847.662.4150 custserv@dynapar.com **Technical Support** 

Tel.: +1.800.234.8731 Fax: +1.847.662.4150 northstar.techsupport@dynapar.com **European Sales Representitive** 

Hengstler GmbH Uhlandstrasse 49, 78554 Aldingen Germany

www.hengstler.com